



LOGICA



APPLICATION

1 or 2 actuators for tilt up doors

CONTROL UNIT POWER SUPPLY


230 Vac - 50/60 Hz

MOTORS POWER SUPPLY

230 Vac / 300 W + 300 W

MAIN FUNCTIONS

Integrated LCD display | Integrated 433.92 MHz 64-code radio receiver with ARC | Removable terminal boards | Automatic, semi-automatic and deadman's logic | Encoder input to detect obstacles | Separate opening and closing limit switches inputs for each motor | Separate limit switch inputs for one motor | Close, step by step and stop inputs | Input for N.C or 8K2 sensitive edge | Photocell input programmable as active in opening-closing or in closing phases | Output configurable as open gate indicator, second radio channel or photocell testing output | Output for flashing light connection | Output for 24 VDC service light | Autosetting of operating parameters (with ZED series motors equipped with encoder) | Electromechanical torque adjustment on 4 levels | Autosetting of operation and slow-down parameters | Adjustable slow-downs | Advantouch system to configure parameters and manage radio transmitters | Number of maneuvers | Programming access password | Maintenance warning

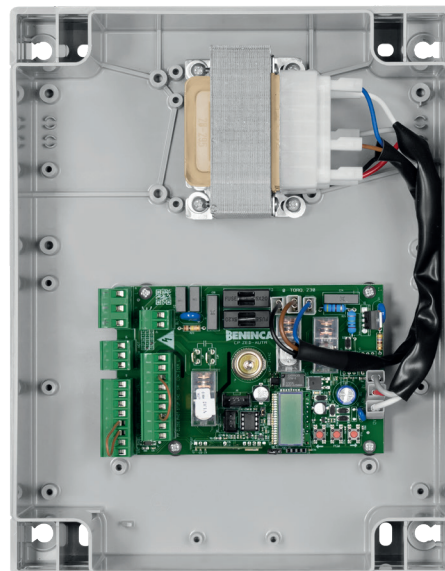

KPO

Set of 2 green push buttons (N.O.) and front cover for Box LB.



KPC

Set of 2 push buttons (green-N.O. and red-N.C.) and front cover for box LB.

AUTOMATISMI BENINCÀ SpA • Via del Capitello, 45 • 36066 Sandrigo (VI) ITALY • T +39 0444 751030 • sales@beninca.com

